

PRESSNET





COMPANY PROFILE

Gurki Packaging Machine Co., Ltd was founded in 1997, located in Shenzhen, south China. As one of the leading domestic packaging machine manufacturers, GURKI PACK specializes in fully integrated automatic packaging machinery to design and implementation of custom automatic packaging systems.

Through years of experience and continually catering to special applications for clients, GURKI PACK can design and build a complete packing solution for customer's various requirements to improve productivities, upgrade packaging appeals, reduce wastes and increase overall profits. Our company has strong technical strength, advanced production facilities and excellent personnel, we establish strict QA and QC team for assuring the high quality of machines, for which most of our products are CE certified and can stand test of time. We attach great importance on products quality and have made great progresses on researching and manufacturing during years of sales, and will surly meet all of your requirements well.

Adhering to the practice of the motto of 'Pursuing the best quality', we gain great trust from clients both at home and abroad. We commit to providing customers with excellent machinery that has high quality, first-rate after-sales service, but reasonable prices. Our main products including: Automatic carton erector, Automatic carton sealer, Semi-auto carton sealer, Sealing machine, Shrink packing machine.

With years of effort, our products have been exported to more than 20 countries: United States, Canada, Sudan, Mexico, Cyprus, South Africa, Australia, New Zealand, Italy, Spain, Russia, Brazil, Iran, Kuwait, Romania, etc.



PRODUCT CATALOGUE



P01-03

CARTON ERECTOR SERIES



P04-14

CARTON SEALER SERIES



P15-24

**SEALING AND SHRINKING
MACHINE SERIES**





CARTON ERECTOR SERIES

Based on principle of 'easy to know how to operate at one glance for common users', Gurki engineering team develops GPK seires carton erector which is suitable for complicated production environment through innovation and study on world carton-erecting technology. The erector with storage system up to 100 cartons, is equipped with alarm system which can remind operator to replenish cartons in time. Erecting system works fast and soft and it can protect cartons free from damage during erection. Bottom sealing system, one of the most advanced sealing technology in China, seals bottom covers of cartons clean and tide for next production process.

GPK-40 Automatic Carton Forming and Bottom Sealing Machine

- Imported parts, electrical and pneumatic components;
- Vertical storage, cartons can be added at any time without stopping the machine;
- Suitable for forming and sealing cartons of the same size;
- Manually adjust to change the carton sizes(finishing in 2-3minutes);
- Advanced photoelectricity induction control system;
- Rationally designed, the forming, folding and sealing process are accomplished simultaneously;
- Cutter Safety system to prevent hands form stabbed by the cutter;
- Heavy duty built, both steel and stainless steel types;
- Light in weight, high performance and speed.

Main Technical Parameters

Model	GPK-40
Production speed	12ctns/min
Carton size(mm)	L250-450 x W150-400 x H100-400
Power supply	110/220V 1 + 50/60Hz 200W
Air compressing	6kg/cm ³
Air consumption	450NL/min
Machine dimension	L2000 x W1900 x H1450mm
Machine weight	450kg
Adhesive tape width	48 / 60 / 75mm



CARTON ERECTOR SERIES

GPK-40H18 Automatic Carton Forming and Bottom Sealing Machine

- Imported parts, electrical and pneumatic components;
- Vertical storage, cartons can be added at any time without stopping the machine;
- Suitable for forming and sealing cartons of the same size;
- Manually adjust to change the carton sizes(finishing in 2-3minutes);
- Advanced photoelectricity induction control system;
- Rationally designed, the forming, folding and sealing process are accomplished simultaneously;
- Cutter Safety system to prevent hands form stabbed by the cutter;
- Heavy duty built, both steel and stainless steel types;
- Light in weight, high performance and speed.

Model	GPK-40H18
Production speed	18ctns/min
Carton size(mm)	L:200-400 W:150-350 H:100-350
Power supply	110/220V 1 φ 50/60Hz 200W
Air compressing	6kg/cm ³
Air consumption	450NL/min
Machine dimension	L2400 × W2050 × H1450mm
Machine weight	550kg
Adhesive tape width	48 / 60 / 75mm



← Work Flow Chart




CARTON ERECTOR SERIES

High Speed Carton Erector

- Imported parts, electrical and pneumatic components:
- Fully cams are driven continuous system assures positive stable motion with maximum stability;
- In a breakthrough for tapping head design ,this machine provides extremely secure sealing effect , outstanding tape smoothing performance ,without tape slipping problems;
- Advanced photoelectricity induction control system:
- Accommodates all type of self-adhesive tapes;
- Easy to operate and adjust .No damage on carton;
- Horizontal cardboard stacking permits for supply of empty carboard at any time;
- Automatic indication for tape replacement or cardboard supply;
- Cutter Safety system to prevent hands form stabbed by the cutter;
- Heavy duty built, both steel and stainless steel types.

Main Technical Parameters

Model	GPK-40H25	GPK-40H40
Production speed	25ctns/min	40ctns/min
Carton size(mm)	L:280 ~ 500 W:200 ~ 400 H:90 ~ 400	L:200 ~ 380 W:150 ~ 300 H:100 ~ 300
Power supply	750 W(AC380V.3 φ)	800 W(AC380V.3 φ)
Air compressing	6kg/cm ³	6kg/cm ³
Air consumption	450NL/min	450NL/min
Machine dimension	L2780 × W 1250 × H1840	L 3540 × W 1250 × H1840
Machine weight	1000kg	1200kg
Adhesive tape width	48 / 60 / 75mm	48 / 60 / 75mm

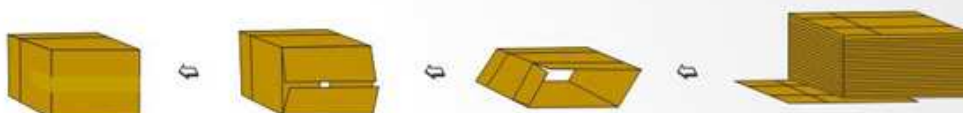

CARTON SEALER SERIES

GPA-50W Carton bottom sealer

- Imported parts, electrical and pneumatic components;
- Side belts driven; top and bottom sealing;
- Manually adjust the height and the width for sealing different sizes of cartons;
- Cutter Safety system to prevent hands from stabbed by the cutter;
- Both steel and stainless steel types;
- Universal type, fit for all kinds of cartons sealing.

Main Technical Parameters

Model	GPA-50W
Conveyor speed	20m/min
Max.Packing size	L∞ X W500 X H800mm
Min.Packing size	L150 X W150 X H50mm
Power supply	110V, 220-240V, 50/60Hz, 1Phase
Power	240W
Adhesive tape width	48 / 60 / 75mm
Machine dimension	L1020 X W850 X H650mm
Machine weight	80Kg



GPK-40S

Semi-automatic box folding machine

- Imported parts, electrical and pneumatic components;
- Manually adjust the width for folding different sizes of cartons;
- Can finish loading on the machine;
- Safety systems installed;
- Both steel and stainless steel types;
- Best choose for the small production company.



GPK-40A Automatic Carton Bottom Folding and Sealing Machine

- Adopt international advanced technology, imported parts and electrical components.
- Automatic clamping according to the carton size; different sizes used at the same time.
- Auto bottom folding and sealing, convenient, high speed and strong applicability.
- Can be operated alone or combined with automatic packaging lines.



Main Technical Parameters

Model	GPK-40S
Packing speed	10 pcs /min
Max. Packing size	L500 X W400 X H∞mm
Min. Packing size	L200 X W150 X H∞ mm
Power supply	110V, 220-240V, 50/60Hz, 1Phase
Power	100W
Air compress	5.5kg/cm ²
Machine dimension	L1000 X W670 X H600mm
Machine weight	80kg

Main Technical Parameters

Model	GPK-40A
Production speed	8 ctns/min
Max.Packing size	L500 X W400 X H600mm
Min.Packing size	L200 X W150 X H100mm
Power supply	110V,220-240V/50-60Hz,1Phase
Power	200W
Adhesive tape width	48 / 60 / 75mm
Machine dimension	L1780 X W850 X H800mm
Machine weight	180Kg



CARTON SEALER SERIES



Stainless Steel




GPA-50 Side Belts Driven Carton Sealer

- Imported parts, electrical and pneumatic components;
- Side belts driven; top and bottom sealing;
- Manually adjust the height and the width for sealing different sizes of cartons;
- Cutter Safety system to prevent hands from being stabbed by the cutter;
- Both steel and stainless steel types;
- Universal type, fit for all kinds of cartons sealing.

Main Technical Parameters

Model	GPA-50
Conveyor speed	20m/min
Max.Packing size	L∞ X W500 X H500mm
Min.Packing size	L150 X W150 X H120mm
Power supply	110V,220-240V/50-60Hz,1Phase
Power	240W
Adhesive tape width	48 / 60 / 75mm
Machine dimension	L1020 X W850 X H1350mm
Machine weight	130Kg

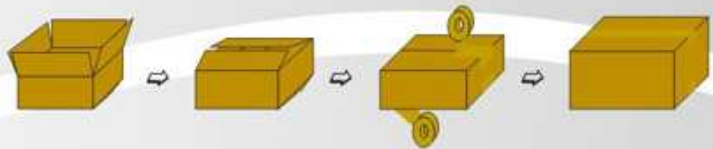

GPA-50P Side and Top Belts Driven Carton Sealer

- Imported parts, electrical and pneumatic components;
- Manually adjust the height and the width for sealing different sizes of cartons;
- Top and side belts driven, top and bottom sealing;
- Cutter Safety system to prevent hands from being stabbed by the cutter;
- Both steel and stainless steel types;
- Better used for heavy cartons sealing.

Main Technical Parameters

Model	GPA-50P
Conveyor speed	20m/min
Max.Packing size	L∞ X W500 X H500mm
Min.Packing size	L150 X W150 X H150mm
Power supply	110V,220-240V/50-60Hz,1Phase
Power	360W
Adhesive tape width	48 / 60 / 75mm
Machine dimension	L1020 X W900 X H1350mm
Machine weight	140Kg



CARTON SEALER SERIES

GPB-56 Top and Bottom Belts Driven Carton Sealer

- Imported parts, electrical and pneumatic components;
- Manually adjust the height and the width for sealing different sizes of cartons;
- Side belts driven; top and bottom sealing;
- Cutter Safety system to prevent hands from being stabbed by the cutter;
- Both steel and stainless steel types;
- Better used for tall cartons sealing.

Main Technical Parameters

Model	GPB-56
Conveyor speed	20m/min
Max.Packing size	L∞ X W500 X H600mm
Min.Packing size	L150 X W180 X H150mm
Power supply	110V,220-240V/50-60Hz,1Phase
Power	240W
Adhesive tape width	48 / 60 / 75mm
Machine dimension	L1020 X W850 X H1450mm
Machine weight	130Kg

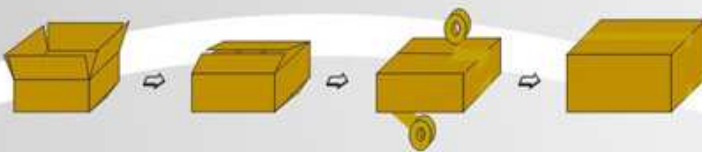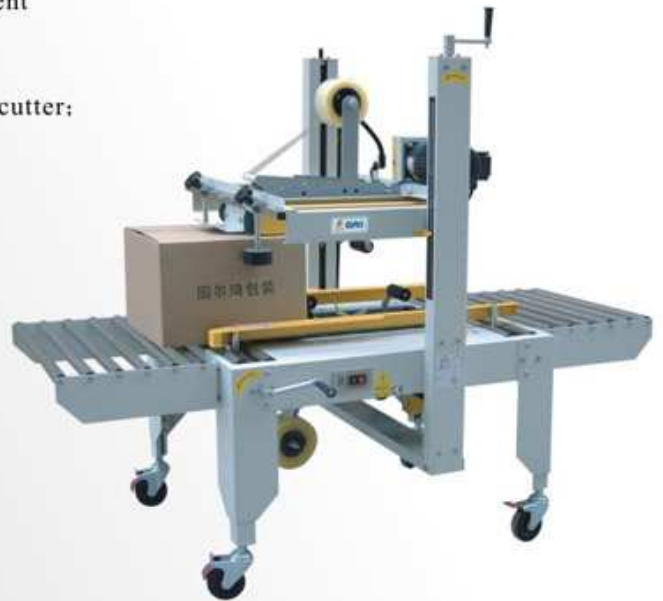

GPC-50A Side Belts Driven Carton Sealer

- Imported parts, electrical and pneumatic components;
- Fold the covers automatically, top and bottom sealing;
- Adopts photoelectricity induction system to control the covers folding;
- Cutter Safety system to prevent hands from being stabbed by the cutter;
- Heavy duty built, both steel and stainless steel types.

Main Technical Parameters

Model	GPC-50A
Conveyor speed	20m/min
Max.Packing size	L600X W500 X H500mm
Min.Packing size	L150 X W150 X H150mm
Power supply	110V, 220-240V, 50/60Hz, 1Phase
Power	240W
Adhesive tape width	48 / 60 / 75mm
Machine dimension	L1180 X W850 X H1450mm
Machine weight	185Kg




GPD-46 Side Belts Driven Carton Sealer



- Imported parts, electrical and pneumatic components;
- Manually adjust the height and the width for sealing different sizes of cartons;
- Up and down side belts driven, top and bottom sealing;
- Cutter Safety system to prevent hands from being stabbed by the cutter;
- Both steel and stainless steel types;
- Better used for sealing the high and flat cartons such as computer case.

Main Technical Parameters

Model	GPD-46
Conveyor speed	20m/min
Max.Packing size	L ∞ X W400 X H600mm
Min.Packing size	L150 X W150 X H240mm
Power supply	110V,220-240V/50-60Hz,1Phase
Power	480W
Adhesive tape width	48 / 60 / 75mm
Machine dimension	L1020 X W880 X H1500mm
Machine weight	180Kg

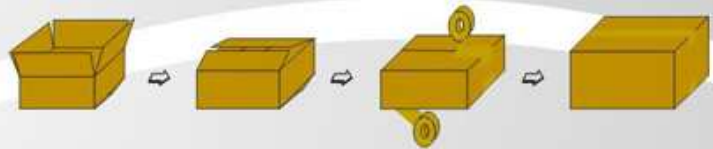

GPS-50 Top and Bottom Belts Driven Carton Sealer



- Imported parts, electrical and pneumatic components;
- Manually adjust the height and the width for sealing different sizes of cartons;
- Top and bottom belts driven, carton side covers sealing;
- Cutter Safety system to prevent hands from being stabbed by the cutter;
- Both steel and stainless steel types;
- Suitable for cartons with side covers.

Main Technical Parameters

Model	GPS-50
Conveyor speed	20m/min
Max.Packing size	L ∞ X W500 X H450mm
Min.Packing size	L150 X W250 X H90mm
Power supply	110V,220-240V/50-60Hz,1Phase
Power	240W
Adhesive tape width	48 / 60 / 75mm
Machine dimension	L860 X W930 X H250mm
Machine weight	150Kg


CARTON SEALER SERIES

GPE-50 Automatic Side Belts Driven Carton Sealer

- Imported parts, electrical and pneumatic components;
- Automatically adjust the height and the width for different size of cartons;
- Advanced pneumatic control system compare with the complicated electrical control system;
- Side belts driven; top and bottom sealing;
- Cutter Safety system to prevent hands form stabbed by the cutter;
- Both steel and stainless steel types;
- Universal type, fit for all kinds of cartons sealing.

Main Technical Parameters

Model	GPE-50
Conveyor speed	20m/min
Max.Packing size	L∞ X W500 X H500mm
Min.Packing size	L150 X W150 X H140mm
Power supply	110V,220-240V/50-60Hz,1Phase
Power	240W
Adhesive tape width	48 / 60 / 75mm
Machine dimension	L1170 X W900 X H1350mm
Machine weight	170Kg

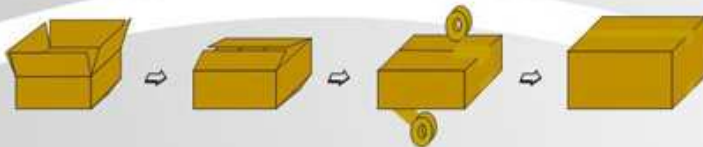

GPE-50P Automatic Side and Top Belts Driven Carton Sealer

- Imported parts, electrical and pneumatic components;
- Automatically adjust the height and the width for different size of cartons;
- Advanced pneumatic control system compare with the complicated electrical control system;
- Top and side belts driven, top and bottom sealing;
- Cutter Safety system to prevent hands form stabbed by the cutter;
- Both steel and stainless steel types;
- Better used for heavy cartons sealing.

Main Technical Parameters

Model	GPE-50P
Conveyor speed	20m/min
Max.Packing size	L∞ X W500 X H500mm
Min.Packing size	L150 X W150 X H150mm
Power supply	110V,220-240V/50-60Hz,1Phase
Power	360W
Adhesive tape width	48 / 60 / 75mm
Machine dimension	L1170 X W900 X H1350mm
Machine weight	180Kg





CARTON SEALER SERIES

GPC-50 Semi-auto Flaps Folding Carton Sealer

- Imported parts, electrical and pneumatic components;
- Fold the covers automatically, top and bottom sealing;
- Adopts photoelectricity induction system to control the covers folding;
- Cutter Safety system to prevent hands from stabbed by the cutter;
- Heavy duty built, both steel and stainless steel types.

Main Technical Parameters

Model	GPC-50
Conveyor speed	20m/min
Max.Packing size	L600 × W500 × H500 mm
Min.Packing size	L200 × W150 × H150mm
Power supply	110V,220-240V/50-60Hz,1Phase
Power	400W
Adhesive tape width	48 / 60 / 75mm
Machine dimension	L1770 × W850 × H1520mm
Machine weight	250kg




Hotmelt glue sealing



Stainless Steel

Work Flow Chart →

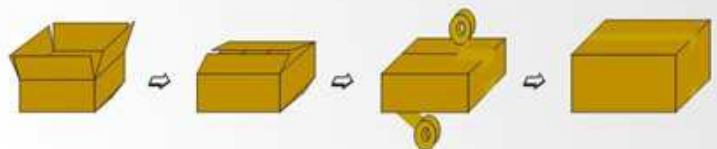

CARTON SEALER SERIES

GPI-50 Automatic Flaps Folding Carton Sealer


- Imported parts, electrical and pneumatic components;
- Fold the covers automatically, top and bottom sealing;
- Adopts photoelectricity induction system to control the covers folding and automatic adjusting;
- Cutter Safety system to prevent hands from stabbed by the cutter;
- Heavy duty built, both steel and stainless steel types.

Main Technical Parameters

Model	GPI-50
Conveyor speed	20m/min
Max.Packing size	L500 × W500 × H500 mm
Min.Packing size	L200 × W150 × H150mm
Power supply	110V,220-240V/50-60Hz,1Phase
Power	240W
Adhesive tape width	48 / 60 / 75mm
Machine dimension	L1700 × W880 × H1450mm
Machine weight	280kg



Work Flow Chart

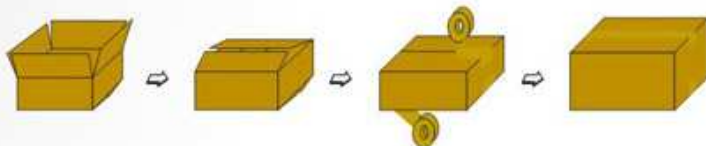




CARTON SEALER SERIES

GPG-50 Semi-auto Corner and Side Type Carton Sealer

- Imported parts, electrical and pneumatic components;
- Manually adjust the height and the width for different sizes of cartons;
- For cartons' four sides and corners sealing;
- Suit for sealing cartons of the same size at the same time;
- Adopts photoelectricity induction control system;
- Automatic 90° cartons turning and pushing system;
- Cutter Safety system to prevent hands from stabbed by the cutter;
- Heavy duty built, both steel and stainless steel types;
- Combined with GPA, GPB, GPC carton sealer to perform carton sealing line.

Main Technical Parameters

Model	GPG-50
Packing speed	480-600Pcs/h
Max.Packing size	L500x W500 x H500mm
Min.Packing size	L320x W200 x H180mm
Power supply	220-240V/50-60Hz, 1Phase
Air compressing	6kg/cm ² 150NL/min
Adhesive tape width	48 / 60 / 75mm
Machine dimension	L1900 x W1130 x H1530mm
Machine weight	400kg

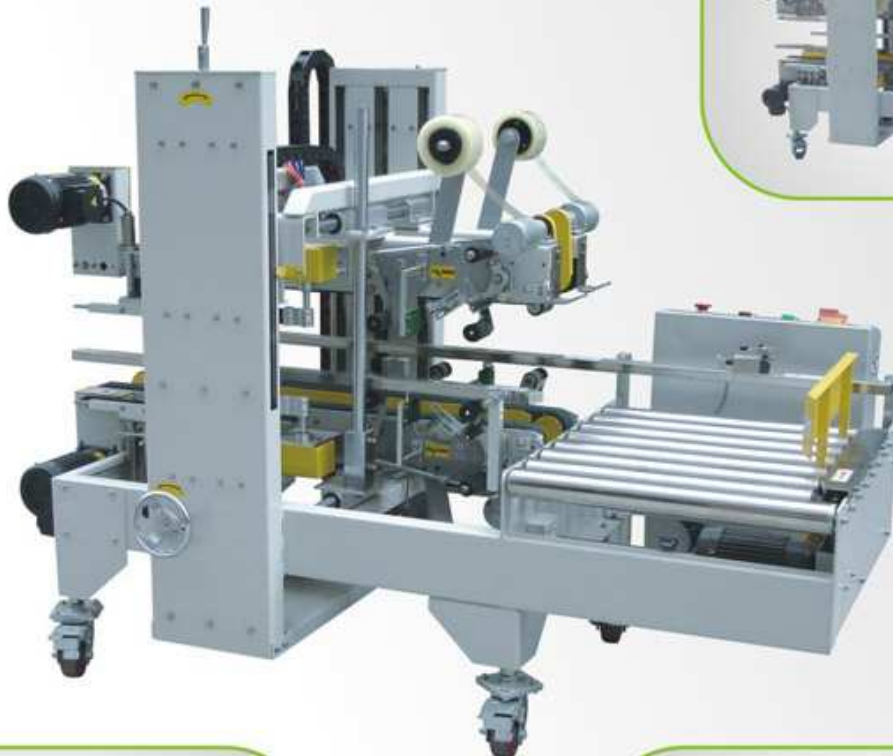

GPA-50 + GPG-50



GPC-50 + GPG-50


CARTON SEALER SERIES

GPH-50 Automatic Corner and Side Type Carton Sealer

- Imported parts, electrical and pneumatic components;
- Automatically adjust the height and the width for different size of cartons;
- For cartons' four sides and corners sealing;
- Suit for sealing cartons of different sizes at the same time;
- Adopts photoelectricity induction control system;
- Automatic 90° cartons turning and pushing system;
- Cutter Safety system to prevent hands form stabbed by the cutter;
- Heavy duty built, both steel and stainless steel types;
- Combined with GPE, GPI to perform "H" type automatic carton sealing line.

Main Technical Parameters

Model	GPH-50
Packing speed	300-360Pcs/h
Max.Packing size	L500 x W500 x H500mm
Min.Packing size	L320 x W200 x H180mm
Power supply	220-240V/50-60Hz, 1Phase
Air compressing	6kg/cm ² 150NL/min
Adhesive tape width	48 / 60 / 75mm
Machine dimension	L2100 x W1200 x H1580mm
Machine weight	450kg

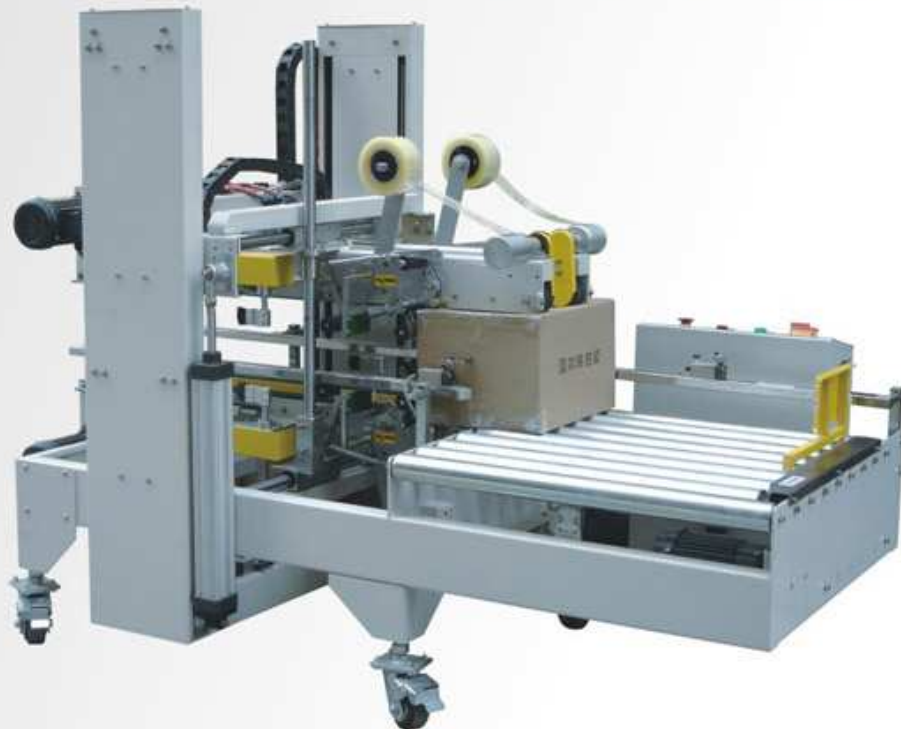



CARTON SEALER SERIES

GPP-50C Automatic Sealing and Strapping Machine

The automatic sealing and strapping machine integrates the function of sealing and strapping cartons automatically. It can be equipped in automatic packaging line, fold and seal top flaps and bottom flaps of cartons, strap machine with several belts, and realize unmanned automatic packaging in the back end. It is of high efficiency, and widely applied in mass production industries like toys, home appliances, printing, pharmaceutical, electronics, daily necessities, etc.

- Sealing and strapping can be operated at the same time, high speed, high efficiency and place saving;
- Controlled by PLC automatic program, easy to be operated and low failure rate;
- Imported photoelectricity is adopted to ensure accurate strapping; can automatically do 1-3 line strapping;
- All actions can be completed automatically, which means packing products without human beings; high capability and low price.

Main Technical Parameters

Model	GPP-50C
Power supply	220V/380V、1 / -3 / 、50-60Hz
Power	1200W
Packing speed	6 ctns/min
Packing size	L200-600 x W150-500 x H150-500mm
PP tape	9 / 12 / 16 x 0.5-1.0mm
Adhesive tape width	48 / 60 / 75mm
Air compressing	6kg/cm ²
Machine dimension	L2460 x W1420 x H1650mm
Machine Weight	500kg



CARTON SEALER SERIES


GPP-50A Automatic Sealing & Strapping Machine

The automatic sealing and strapping machine is a packing machine which integrates the function of sealing and strapping cartons automatically. It can be equipped in automatic packaging line, seal tapes on the top and in the bottom, strap machine with several belts, and improve the automation packaging degree in the back end. It is of high efficiency, and widely applied in mass production industries like toys, home appliances, printing, pharmaceutical, electronics, daily necessities, etc.

- Sealing and strapping can be operated at the same time, high speed, high efficiency and place saving;
- Controlled by PLC, easy to operate and low failure rate;
- Imported sensor is adopted to ensure accurate strapping; can automatically do 1-3 line strapping;
- Can be used in stand-alone; high capability and low price.

Main Technical Parameters

Model	GPP-50A
Power supply	220V/380V、1 / -3 / 、 50-60Hz
Power	1000W
Packing speed	6 ctns/min
Packing size	L200-600 x W150-500x H150-500mm
PP tape	9 / 12 / 16 x 0.5-1.0mm
Adhesive tape width	48 / 60 / 75mm
Air compressing	6kg/cm ²
Machine dimension	L1620 x W1420 x H1550mm
Machine Weight	400kg

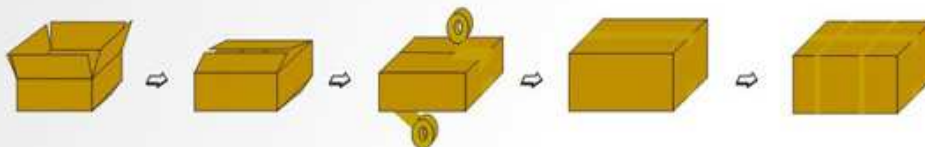



SEALING AND SHRINKING MACHINE SERIES


GPL-4535 + GPS-4525 Automatic Sealing and Shrinking Machine

GPL-4535 Automatic L-bar Sealing Machine can seal the product without manual operation and be equipped in automatic packaging line. It can pack the product automatically, which includes feeding, loading, sealing, and shrinking. It is widely applied in mass production industries like printing, color boxes, greeting cards, photo albums, pharmaceutical, electronics, daily chemicals, cosmetics, etc.

- Special imported materials cutter coating with Du Pont Teflon heat-resistant and anti-adhering material from USA.
- Adopt horizontal and vertical sensor, easy to switch, fit for thin and small products.
- Automatic product feeding; waste film collecting system; product length can be adjusted automatically by sensor and timer.
- Packing product protecting system.
- Safety cover device with alarm system.

Main Technical Parameters

Model	GPL-4535	GPS-4525
Machine dimension	L1830 × W850 × H1550 mm	L1300 × W715 × H1455 mm
Packing size	L+H ≤ 450/W+H ≤ 350mm	L700 × W400 × H200mm
Cutter size/tunnel size	L550 × W450mm	L1000 × W450 × H250mm
Packing speed	1 ~ 25 pcs/min	20 ~ 40 pcs/min
Net weight	250kg	185kg
Power	2kw	10kw
Power supply	3 φ 220V/380V 50/60Hz	3 φ 220V/380V 50/60Hz
Air compressing	5.5kg/cm ³	/
Max current	10 A	30 A

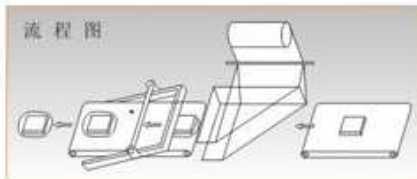

SEALING AND SHRINKING MACHINE SERIES

GPL-5545D + GPS-5030W


Automatic Vertical L-bar Sealing and Shrinking Machine

GPL-5545D Automatic Vertical L-bar Sealing Machine is a new type of automatic L-bar sealing machine, with high degree of automation and working efficiency. It is widely applied in mass production industries like printing, color boxes, greeting cards, photo albums, picture frames, pharmaceutical, electronics, daily chemicals, cosmetics, etc.

- Vertical cutting system, prevent crumples.
- Sealing height is adjustable to ensure the sealing line is in the middle of the product height.
- Adopt horizontal and vertical sensors, easy to switch, fit for thin or small products.
- PLC control system, easy to operate, safety and warning function.
- Particularly suitable for high and big products.

Main Technical Parameters

Model	GPL-5545D	GPS-5030W
Machine dimension	L1850 × W1450 × H1410mm	L1770 × W1000 × H1240mm
Packing size	W+H ≤ 430mm L+H ≤ 500mm	L1000 × W450 × H250mm
Cutter size /tunnel size	L550 × W450mm	L1200 × W500 × H300mm
Packing speed	20 ~ 35 pcs/min	20 ~ 50 pcs/min
Machine weight	700kg	350kg
Power	5.5kw	13kw
Power supply	1 φ 220V 50/60Hz	3 φ 220V/380V 50/60Hz
Air compressing	5.5 kg/cm ³	/
Max current	10 A	30A

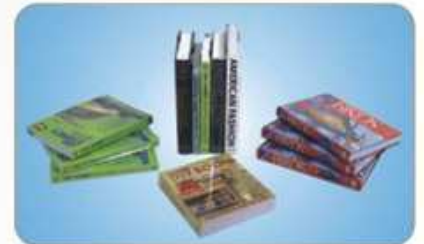



SEALING AND SHRINKING MACHINE SERIES

GPL-5545C + GPS-5030

Automatic Side Sealing and Shrinking Machine

According to customers' different demands, this machine is designed into a medium speed sealing machine based on high-speed side sealing machine. It adopts the photoelectricity to automatically detect the products, and realizes the function of unmanned automatic packaging with high working efficiency. The machine is suitable for packing all kinds of products with different sizes and shapes. It is widely applied in mass production industries like aluminium, water pipes, printing, photo albums, electronics, daily chemicals, cosmetics, etc.

- Imported parts are adopted to ensure the machine's stable running with high speed;
- The cutter adopts vertical system drive to ensure sealing lines straight and tight;
- With the design of side sealing, the packing length of products is unlimited;
- The sealing height can be adjusted based on the product height;
- Widely used in all kinds of products with different sizes and shapes;

Main Technical Parameters

	GPL-5545C	GPS-5030
Model	GPL-5545C	GPS-5030
Power supply	3 φ 220V/380V 50/60Hz	3 φ 220V/380V 50/60Hz
Power	3kw	13kw
Packing size	L ∞ × W+H ≤ 450 mm	L1000 × W450 × H250 mm
Cutter size /tunnel size	L550 × W450mm	L1300 × W500 × H300 mm
Packing speed	20 ~ 40pcs/min	20 ~ 50pcs/min
Air compressing	5.5kg/cm ²	/
Max current	10 A	30 A
Machine weight	300kg	200kg
Machine dimension	L1650 × W900 × H1550mm	L1640 × W780 × H1625mm



SEALING AND SHRINKING MACHINE SERIES

GPL-5545H + GPS-5030LW

High Speed Side Sealing and Shrinking Machine

GPL-5545H High Speed Side Sealing Machine can pack products automatically with high speed. It adopts the sensors to detect products automatically. Its maximum packing speed is up to 60 pcs/min, and suitable for products with different sizes and shapes. This machine is controlled by touch screen system, which is easy to operate and store packing data of different products at the same time. The data can be directly taken out from the system at any time, which greatly shorten the time required for replacing packaging products.

- Imported parts and pneumatic components are adopted to ensure the machine's stable running with high speed;
- Imported servo motor controls the cutter to ensure accurate sealing and firm sealing line;
- With the design of side sealing, the packing length of products is unlimited;
- The sealing height can be adjusted based on the product height;
- Data storage is functioned as putting packing parameters of products into the system so as to rapidly convert packaging products;
- Error alarm, function display;
- Widely used in all kinds of products with different sizes and shapes.

Main Technical Parameters

Model	GPL-5545H	GPS-5030LW
Power supply	3 φ 220V/380V 50/60Hz	3 φ 220V/380V 50/60Hz
Power	3kw	16kw
Packing size	L∞ × W+H ≤ 450 mm	L1200 × W450 × H250 mm
Product W+H /tunnel size	L550 × W450mm	L1500 × W500 × H300 mm
Packing speed	20 – 60pcs/min	20 – 60pcs/min
Air compressing	5.5kg/cm ²	/
Max current	10 A	32 A
Machine weight	800kg	650kg
Machine dimension	L2050 × W1580 × H1740mm	L2000 × W1100 × H1250mm





SEALING AND SHRINKING MACHINE SERIES

GPL-6030D + GPS-6040

Automatic double side sealing and shrinking machine

Automatic double side sealing and shrinking machine integrate the world's high speed sealing technology. Design for big and heavy products. Films installed at the top and the bottom. When the product moves forward, two sides can be sealed by the side sealer. This machine includes straight feed-in and upright feed-in function. According to different sizes of products, machine can be adjusted by the PLC automatically. Waste film collecting system makes the environment tidy and clean. 2 fans motors ensure the air flow equality. Grouped products can be sealed automatically and perfectly. Closed Such packing can provide your product a water proof and light proof. Sealing line and sealing effect is perfect. Product height and length is unlimited.

- Double side sealing;
- Suitable for heavy and big products;
- Sealing height is adjustable base on product size;
- Packing height and length is unlimited;
- Adopts imported parts;
- Suitable for POF, PE film;

Main Technical Parameters

Model	GPL-6030D	GPS-6040
Power supply	3 φ , 220/380V, 50/60Hz	3 φ , 220/380V, 50/ 60Hz
Power	4KW	22KW
Packing size (W+H)	≤ 900mm	L1500 × W650 × H330mm
Cutter size /tunnel size	1000mm	L1800 × W600 × H400mm
Packing speed	6-12 pcs /min	20-80pcs/min
Air compressing	6 kg/cm ³	/
Machine dimension	L1600 × W1400 × H1700mm	L2700 × W900 × H1640mm
Max current	10A	35A
Machine weight	500kg	400kg



SEALING AND SHRINKING MACHINE SERIES

GPL-6030S + GPS-6040 Semi-automatic Sleeve Sealing and Shrinking Machine

Semi-auto sleeve sealing and shrinking machine is an economical sleeve sealer packaging machine, easy to control. Based on different requirements to choose to push the product manually or pneumatically, semi-auto sleeve sealer is fit for packaging single product or groups of products, such as, cartons, beverage, cosmetics and electronic products.

- Adopts the imported components;
- Specially processed the sealing cutter, make a perfect sealing line, avoid the film sticking the cutter;
- Automatic pushing, film feeding, cutting and sealing;
- The front frame can be adjusted according to different products;
- Apply to multi- combinations products with tray or without tray;
- Apply PE film.



GPL-6030Z + GPS-6040 Automatic Frontal feeding sleeve sealing and shrinking machine

GPL-6030Z+GPS-6040 adopts international advanced technology. Suitable for working with automatic packing line. Auto Sleeve Wrapper is designed for the single product or the products with a tray.

- Imported parts, electrical and pneumatic components;
- Adopts specially designed sealing cutter, results in perfect sealing line, avoid the film sticking the cutter;
- Automatic feeding, film feeding and sealing;
- Non-polar mechanical speed adjustment, adjust the speed of feeding conveyor;
- The front frame is adjustable according to different product sizes;
- Adopt automatic sensors for detecting, locating, sealing;
- Unlimited length of products;
- Adopts PE film;



Main Technical Parameters

Model	GPL-6030S	GPL-6030Z	GPS-6040
Power supply	3 √ , 220/380V, 50/60Hz	3 √ , 220/380V, 50/60Hz	3 √ , 220/380V, 50/ 60Hz
Power	1.5KW	2KW	22KW
Packing size (W+H)	≤ 700mm	≤ 700mm	L1500 × W650 × H330mm
Cutter size /tunnel size	700	850mm	L1800 × W600 × H400mm
Packing speed	0-12 pcs /min	8-22 pcs /min	20-80pcs/min
Air compressing	6 kg/cm ²	6 kg/cm ²	/
Machine dimension	L2050 × W1580 × H1320mm	L1650 × W920 × H1895mm	L2700 × W900 × H1640mm
Max current	10A	10A	35A
Machine weight	390kg	465kg	400kg



SEALING AND SHRINKING MACHINE SERIES

GPL-6030 + GPS-6040

Automatic Sleeve Sealing and Shrinking Machine

Auto sleeve sealing and shrinking machine integrate the world's advance technology.

Can combine with production line to fulfill a fully automatic packing line. This machine works well at single product or groups of products with tray. Suit for carton box, beer, drinks and cosmetic, etc.

- Imported advanced parts;
- Special cutter installed. Perfect sealing line. No split, no sticking;
- Auto product feeding, pushing, film feeding and sealing;
- Stepless speed adjustment, can adjust feeding speed;
- Easy to operate. Change size in 2-3 min;
- The direction of the feeding conveyor can be changed according to customer's request; (Left feeding conveyor or right feeding conveyor)
- Suitable for PE film.

Main Technical Parameters

Model	GPL-6030	GPS-6040
Power supply	3 φ , 220/380V, 50/60Hz	3 φ , 220/380V, 50/ 60Hz
Power	2KW	22KW
Packing size (W+H)	≤ 700mm	L1500 × W580 × H330mm
Cutter size /tunnel size	700mm	L1800 × W600 × H400mm
Packing speed	8-18 pcs /min	20-80pcs/min
Air compressing	6 kg/cm ²	/
Machine dimension	L1360 × W2120 × H1900mm	L2700 × W900 × H1640mm
Max current	10A	35A
Machine weight	420kg	400kg



SEALING AND SHRINKING MACHINE SERIES

GPL-6030AH + GPS-6040

Automatic Sleeve sealing and shrinking machine

Automatic Sleeve sealing and shrinking machine is a type of automatic sleeve wrapping packaging machine. It adopts international advanced technology. It is able to work in automatic packaging line to finish automatic unmanned packaging. suitable for a set of several products without tray, such as: beer, beverages, and cosmetics.

- Adopts world advanced components, stable and durable;
- Sealing cutter is specially designed. Sealing line is firm, without cracking, and without sticking to the knife;
- Automatic feeding, iteming, product pushing, film feeding and sealing;
- Non-polar mechanical speed adjustment, adjust speed of feeding conveyor;
- It can package several sets without tray in row 2, row 3 and row 4 according to requirement. It can replace the packing way via changeover switch on control panel;
- Operation is easy and simple. It only takes 2-3 minutes to change different type;
- According to different bottle shape, design automatic feeding device;
- Direction of feeding conveyor can be based on customer needs, to be left or right feeding;
- Suitable for PE shrink film.

Main Technical Parameters

Model	GPL-6030AH	GPS-6040
Power supply	3 ϕ . 220/380V, 50/60Hz	3 ϕ . 220/380V, 50/ 60Hz
Power	2KW	22KW
Packing size (W+H)	\leq 700mm	L1500 \times W650 \times H330mm
Cutter size /tunnel size	700mm	L1800 \times W600 \times H400mm
Packing speed	6-14 pcs /min	20-80pcs/min
Air compressing	6 kg/cm ²	/
Machine dimension	L1360 \times W2120 \times H1900mm	L2700 \times W900 \times H1640mm
Max current	10A	35A
Machine weight	465kg	400kg





SEALING AND SHRINKING MACHINE SERIES

GPL-5545T Semi-Auto L Bar Sealer



GPL-5545P Pneumatic L Bar Sealer



Main Technical Parameters

Model	GPL-5545T	GPL-5545P
Power supply	110/220V 50/60Hz 1.2KW	110/220V 50/60Hz 1.2KW
Packing speed	800-1000pcs/h	800-1000pcs/h
Max. packing size	L450 X W400 X H250 mm	L450 X W400 X H250 mm
Cutter size	L550 X W450 mm	L550 X W450 mm
Machine dimension	L1600 X W775 X H1000mm	L1560 X W775 X H1000mm
Machine weight	130Kg	140Kg



2 in 1 Sealing & Shrinking Packager

Main Technical Parameters

Model	GPL-5540S
Power supply	220V 50/60Hz 1.5A 2.5KW
Packing speed	500-800pcs/h
Max. packing size	L550 X W420 X H300mm
Cutter size	L550 X W400 mm
Machine dimension	L1260 X W810 X H1450mm
Machine weight	130Kg

SEALING AND SHRINKING MACHINE SERIES

GPS-4525 Shrink Packing Machine

Main Technical Parameters

Model	GPS-4525
Power supply	380V 50/60Hz 3 φ
Heater power	10KW
Packing speed	20-40 pcs/min
Conveyor loading	Max:10Kg
Tunnel size	L1000 X W450 X H250mm
Machine weight	185Kg
Machine dimension	L1300 X W715 X H1455mm



GPS-5030 Shrink Packing Machine

Main Technical Parameters

Model	GPS-5030
Power supply	380V 50/60Hz 3 φ
Heater power	13KW
Packaging speed	20-40pcs/min
Conveyor loading	Max:10Kg
Tunnel size	L1300 X W500 X H300mm
Machine weight	200Kg
Machine dimension	L1600 X W770 X H1520mm



GPS-6040 Shrink Packing Machine

Main Technical Parameters

Model	GPS-6040
Power Supply	380V 50/60Hz 3 φ
Heater Power	22kw
Packing Speed	20-80 pcs/min
Tunnel Size	L1800 X W600 X H400mm
Machine Weight	400kg
Machine dimension	L2700 X W900 X H1640mm





pressnet@pressnet.com.au

0412 720060